



			San	nple I	Power	's kW	(hp)			
	Ratio									
	6.179			2000 (2	682)	2400	(3218)	3200 (429	91)	_
	5.593				2344 (3143)		2813 (3	772)	3750 (50	
0	4.933				2344 (3143)	,	2813 (3	772)	3750 (50	
W 20000	4.364				2344 (3143)		2813 (3	772)	3750 (50	
Ň	3.658				2344 (3143)		2813 (3	772)	3750 (50	
	3.317				2344 (3143)	•	2813 (3	772)	3750 (50	
	3.214				2344 (3143)		2813 (3	772)	3750 (50	29)
	0	500	1000	1500	2000	2500	3000	3500	4000	4500
			1 0	00 Rpm	1200 Rpm	n 🔳 1600	Rpm			Power(kW)

Model	W20000						
Power/RPM (hp/RPM)	Maximum kW rated input (hp)	Ratio	Maximum input RPM				
		3,214					
		3,317					
2,344 (3,143)	4219 (5658)	3,658	1800				
2,344 (3,143)	4219 (3038)	4,364	1800				
		4,933					
		5,593					
2,000 (2,682)	3600 (4828)	6,179					
Dry weight kg(lb)	5700 (12570)						
SAE bell	Free standing						
Туре	Vertical offset						
Kinematics	Non Reversible, Engine Wise and Counter Engine Wise						

Description

- Robust design and easy onboard maintenance.
- Robust design also withstands continuous duty in workboat,dredger applications.
- Fully works tested, reliable and simple to install.
- Reverse reduction marine transmission with hydraulically actuated multi-disc clutches.
- Case hardened and precisely ground gear teeth for long life and smooth running.
- Robust cast iron casing for direct or remote mounting.
- Emergency "get home" capability.
- Design, manufacture and quality control standards comply with ISO.
- Suitable for twin installation with 100% rated power in ahead and astern condition.


Standard Equipment


- Oil cooler complete with fittings and flexible hoses.
- Integrated Brackets.
- Free Standing.
- Lube Oil Pump.

Option

- Engine-matched torsional coupling.
- Propeller shaft flange and coupling bolt set.
- Classification by all major Classification Societies on request.
- PTO (live or clutchable).
- Electric trolling valve for slow-speed drive.
- Shaft brake.
- Electric clutch control.




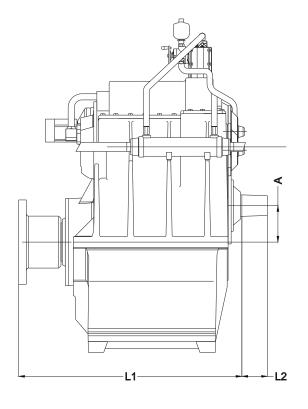

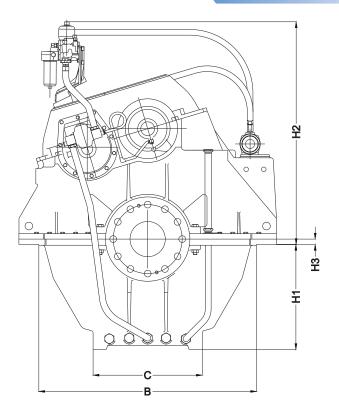

Model	А	В	С	H1	H2	H3	L1	L2	Dry Weight kg (lb)
W20000	720	1420	712	685	1491	-35	1479	163	5700(12570)

All dimensions in mm.



Output Coupling dimension											
A		В		С		D		Bolt Holes			
								Ma	Diameter (E)		
mm	inch	mm	inch	mm	inch	mm	inch	No.	mm	in	
550	21,7	450	17,7	280	11,0	50,0	1,97	12	43,0	1,69	

Masson Marine products are available all over the world through our network of dealers

Dealer:



f www.masson-marine.com in contact@masson-marine.com 5 rue Henri Cavallier

