


Model		W20500			
Power/RPM	kW/RPM (hp/RPM)	Maximum rated input	kW (hp)	Ratio	Maximum input RPM
2,527 (3,389)		3766 (5051)		2,661	1490
				3,029	
				3,613	
				4,085	
2,127 (2,852)		3510 (4706)		4,849	1650
1,790 (2,400)		2954 (3961)		5,757	
1,729 (2,319)		2853 (3826)		5,959	
1,560 (2,092)		2574 (3452)		6,610	
1,404 (1,883)		2317 (3107)		7,345	
1,260 (1,690)		2079 (2788)		8,184	
1,170 (1,569)		1931 (2589)		8,810	
1,086 (1,456)		1792 (2403)		9,496	
1,170 (1,569)		1931 (2589)		9,989	
1,206 (1,617)		1990 (2668)		10,251	
1,086 (1,456)		1792 (2403)		10,767	
1,120 (1,520)		1848 (2478)		11,036	
1,039 (1,393)		1714 (2299)		11,895	
Dry weight	kg(lb)	5800 (12790)			
SAE bell		Free standing			
Type		Vertical offset			
Kinematics		Non Reversible, Engine Wise and Counter Engine Wise			

Sample Powers (kW/hp)

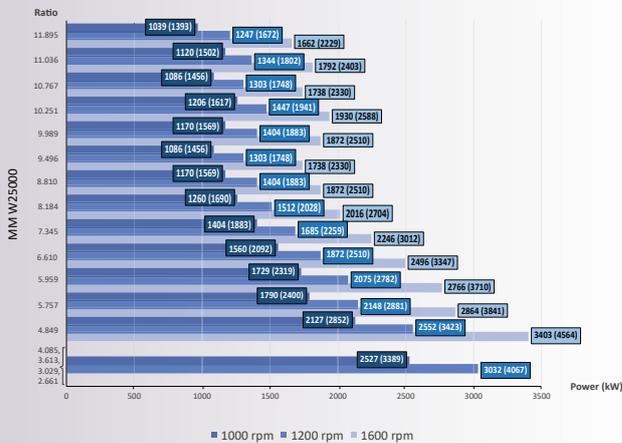

Description



- Robust design and easy onboard maintenance.
- Robust design also withstands continuous duty in workboat, dredger applications.
- Fully works tested, reliable and simple to install.
- Reverse reduction marine transmission with hydraulically actuated multi-disc clutches.
- Case hardened and precisely ground gear teeth for long life and smooth running.
- Robust cast iron casing for direct or remote mounting.
- Emergency "get home" capability.
- Design, manufacture and quality control standards comply with ISO.
- Suitable for twin installation with 100% rated power in ahead and astern condition.

Standard Equipment

- Oil cooler complete with fittings and flexible hoses.
- Integrated Brackets.
- Free Standing.
- Lube Oil Pump.


Option

- Engine-matched torsional coupling.
- Propeller shaft flange and coupling bolt set.
- Classification by all major Classification Societies on request.
- PTO (live or clutchable).
- Electric trolling valve for slow-speed drive.
- Shaft brake.
- Electric clutch control.

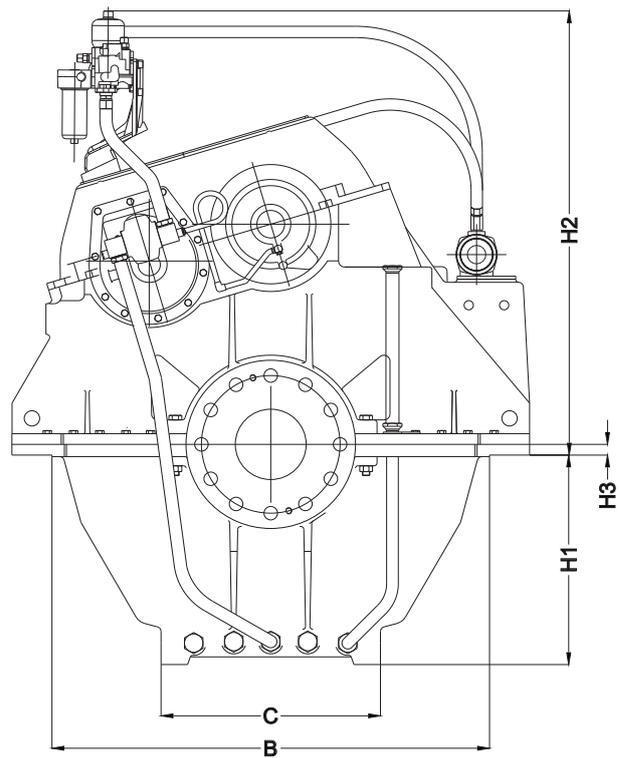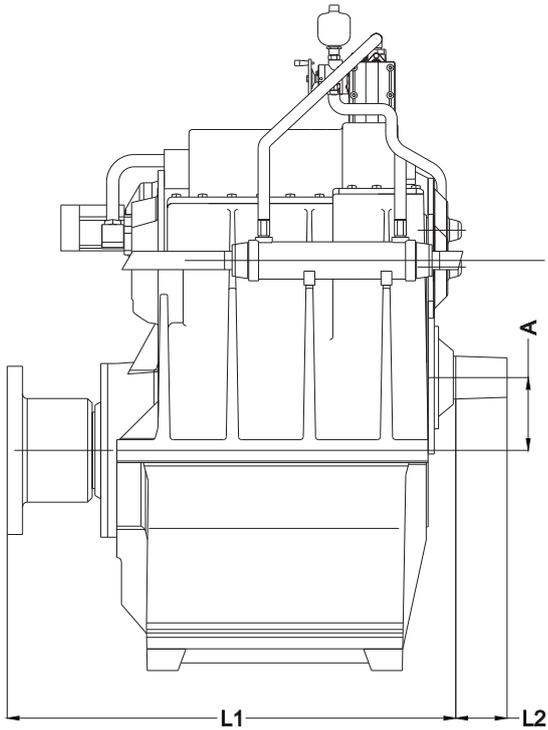

Model	A	B	C	H1	H2	H3	L1	L2	Dry Weight kg (lb)
W20500	238	1420	712	685	1491	-35	1456	167	5800(12790)

All dimensions in mm.

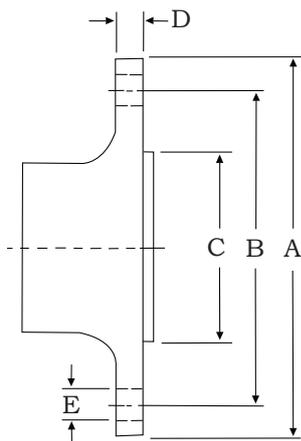

Output Coupling dimension

A		B		C		D		Bolt Holes		
mm	inch	mm	inch	mm	inch	mm	inch	No.	Diameter (E)	
									mm	in
550	21,7	450	17,7	280	11,0	50,0	1,97	12	43,0	1,69

Masson Marine products are available all over the world through our network of dealers

Dealer:



www.masson-marine.com



contact@masson-marine.com

5 rue Henri Cavallier

89100 Saint Denis les Sens - France

